


1/16

F16. 2


3/16

A00593

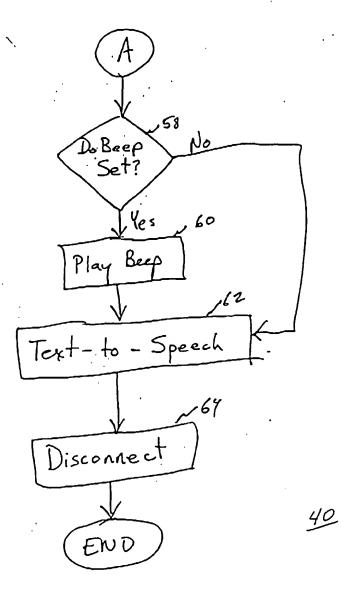


F16.3

i

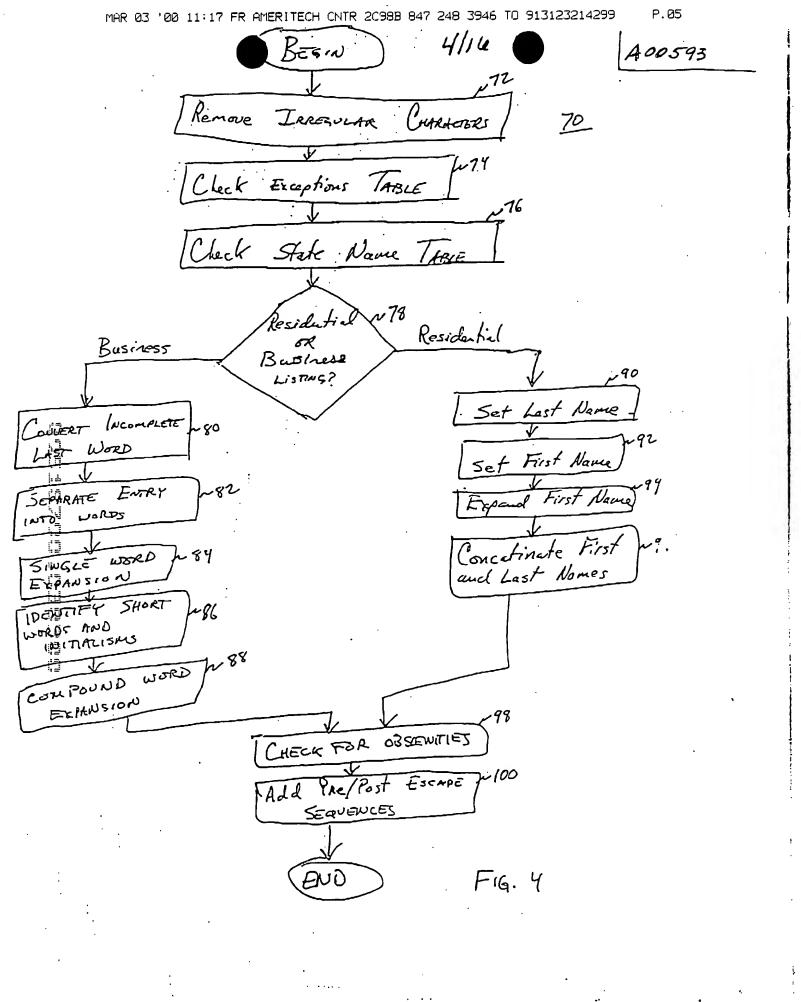

that that the time are the time and the time that the time are the time that the

A 00593

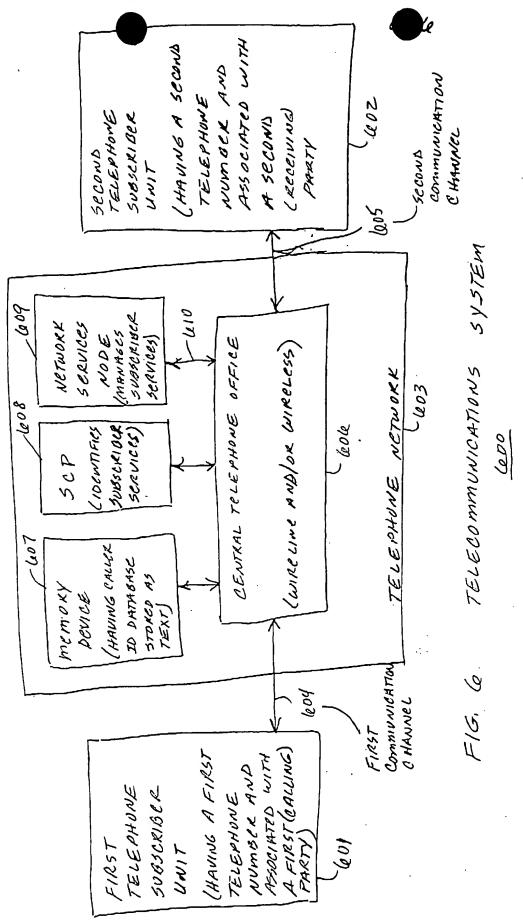



...


7/12

· CALLER ID NAME-TO-TEXI FIRST AND SECOND ENDOW-5 YMBOL-TO-DATA STREAM ho6-(THIRD EMBODIMENT, SYMBOLS PRIFERMED - 911 - 912 -> (THIRD EMBODIMENT TEXT-TO-5YM80LS TEXT EG., FSK ENCOUCK) NETWORK SERVICES NODE PROCESSOR (REPLOCESSOR CONVERTER ENCODER 202 707 200 mewry STREAM 0x14 404 MEMORY DEVICE TELEPHONE MTERFACE F16. 7 802. CENTRAL 701 MODULE STREAM DATA 410

609

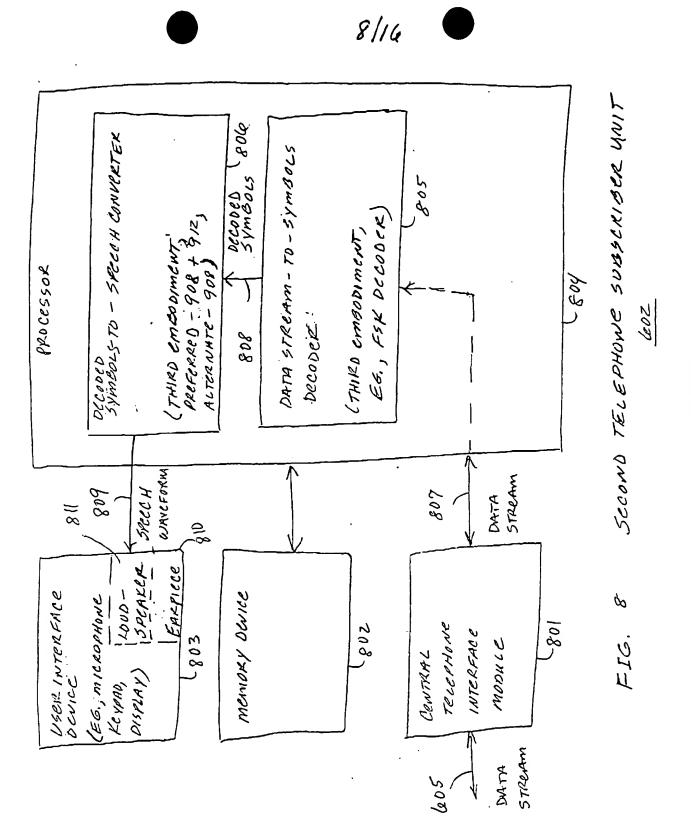

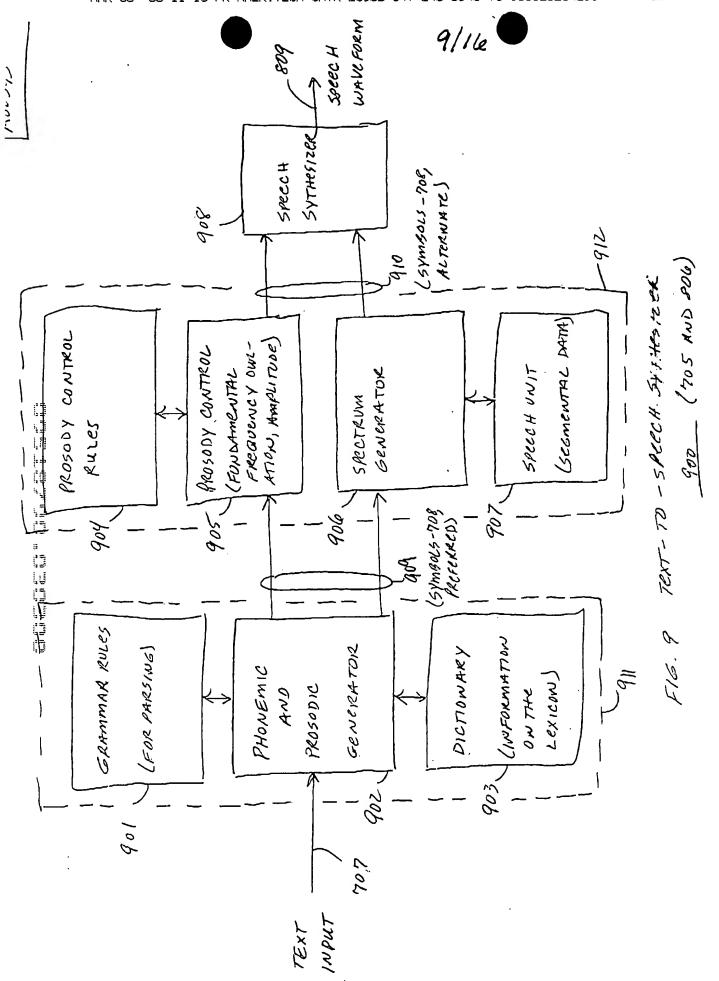

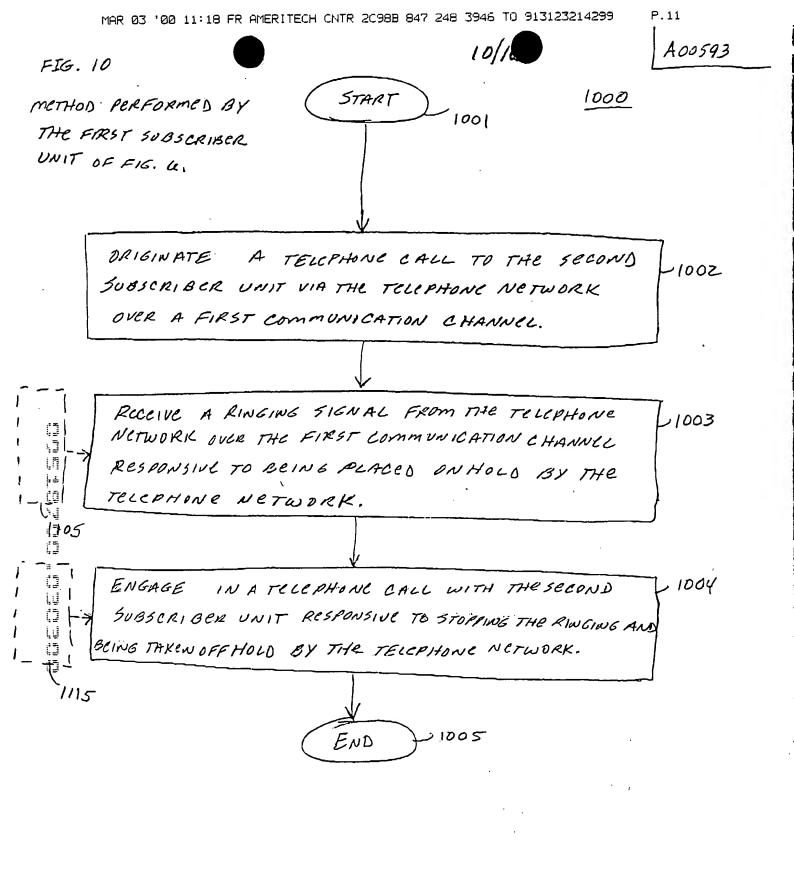

A00.593

RECEIVE THE TELEPHONE CALL FROM THE FIRST

TELEPHONE BUBBCRIBER UNIT OVER THE FIRST

F16. 11 METHOD PERFORMED BY THE TELEPHONE NCTWORK OF FIGHE,

1100 START

11102 COMMUNICATION CHANNEL TO THE SECOND TELEPHONE SUBSCRIBER UNIT ASSOCIATED WITH A SECOND PARTY

DETERMINE THAT THE SECOND PARTY SUBSCRIBES -1103 TO A SPEECH-BASED CALLER IDENTIFICATION SERVICE, FROM THE TELEPHONE NETWORK.


PLACE THE FIRST TELEPHONE SUBSCRIBER UNIT ON HOLD. -1104


SEND A RINGING SIGNAL TO THE FIRST -1105 TELEPHONE SUBSCRIBER UNIT OVER THE FIRST COMMUNICATION CHANNEL.

RETRIEVE TEXT INFORMATION, REPRESENTING -1106 CALLER IDENTIFICATION INFORMATION OF THE FIRST PARTY, FROM A DATABASE STORED. IN A NETWORK MEMORY DEVICE.

CONVERT THE TEXT INFORMATION INTO 1107 SYMBOLS, REPRESENTING CALLER IDENTIFICATION OF THE FIRST PARTY.


P.13

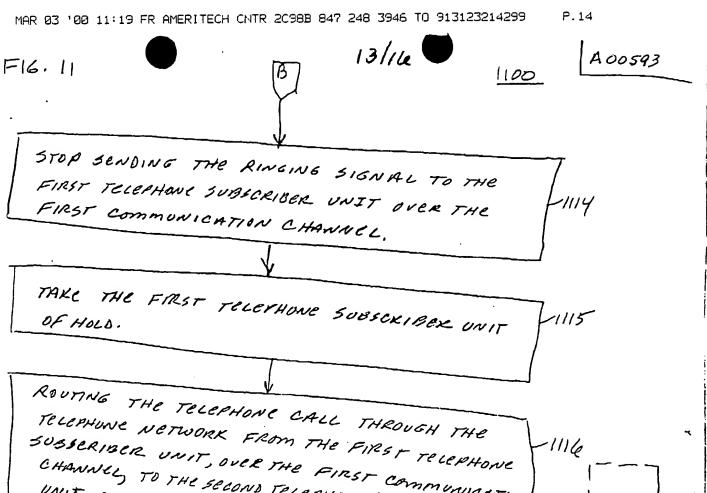

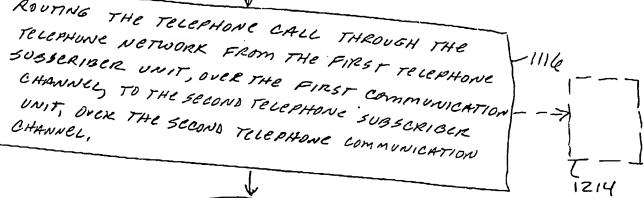

END

-

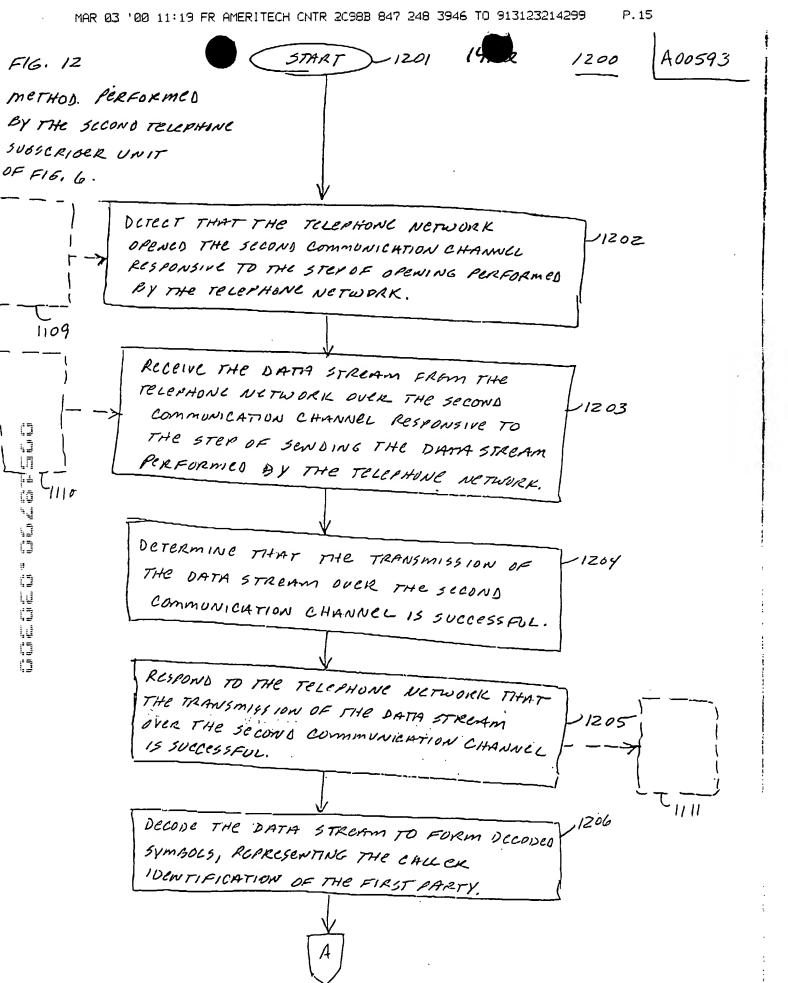

Ü

M

4112 آپٍ ۱۰

